

Consolidated*

3900 MPV Series

Pilot-Operated Safety Relief Valve

Overview

BHGE's unique pilot valve design combines enhanced performance, capabilities and features within an economical, modular assembly. The 3900 series pilot-operated safety relief valve design provides an optimized safety system that offers application versatility while providing cost-effective standardization.

Specifications

INLET SIZES	1" (25 mm) through 12" (305 mm)
OUTLET SIZES	2" (51 mm) through 16" (406 mm)
INLET RATINGS	ASME Class 150 through 2500
OUTLET RATINGS	ASME Class 150 through 300
ORIFICE SIZES	Eleven inlet sizes: D through T and Full bore options
PRESSURE RANGE	15 psig (1.03 barg) to 6250 psig (431 barg)
TEMPERATURE RANGE	-320°F (-196°C) to 650°F (343°C)
MATERIALS	
MAIN VALVE (Std.)	Carbon steel base and 316 stainless steel internal components
PILOT VALVE (Std.)	316 stainless steel base and internal components

Features and Benefits

- Closed bonnet for spring protection.
- Pilot gag prevents the pilot-operated relief valve from opening while equipment is undergoing operational hydrostatic testing.
- Pop action and modulating pilot allows for application versatility.
- Unique pilot seat design allows for self cleaning operation and is tolerant to icing and dirty conditions.
- Adjustable blowdown - the first and only non-flowing modulating pilot with main valve blowdown control.
- Remote actuation and sensing.
- Operation closer to set point improves process efficiency versus



direct spring operated valves.

- The metal seat option incorporates proven technology from the 1900 series safety relief valve seat design.
- The addition of a heat exchanger increases the metal seat option temperature range to -320°F (-196°C) to 650°F (343°C).

3900 Flanged Series Valve Overview

BHGE, a world leader in providing safety and safety relief valve solutions, offers the 39PV and 39MV pilot valve designs for enhanced performance, capabilities and features within an economical, modular assembly. Proven concepts and principles refined from more than 100 years of successful design and application experience are integrated into BHGE's line of Consolidated MPVs, resulting in a new and highly reliable pilot-operated safety relief valve that provides ease of operation and maintenance.

With global environmental concerns continuing to rise, improving the operational efficiency of all types of process plants can be critical to success. The demand for relief valves that provide bubble-tight operation and precise opening and closing pressures is also increasing. BHGE's line of Consolidated pilot-operated safety relief valves offers high quality products, performance characteristics and features that help our customers meet today's industry demands.

Combining pilots into one unique design provides significant benefits. The 3900 series pilot valve is well-suited for incompressible and compressible applications, including steam. Our valves are easily adaptable for various applications, requiring only the appropriate soft goods and options to meet service conditions.

Versatility

Consolidated MPV is the first entirely modular pilot-operated safety relief valve design that combines pop and modulating functions within a single assembly that is suitable for incompressible and compressible fluids, including steam.

Consolidated MPV pilot-operated safety relief valves meet API 526 requirements. For higher capacity requirements, full bore sizes are available up to 69.94 in² (451.225 cm²), some with dual outlets. Available full bore pressure class ratings are ASME Class 150 to Class 1500.

Standard Features

Standard Features	39PV Pop Action Pilot	39MV Modulating Action Pilot
Full Lift	at Set Pressure	110% of Set Pressure
Adjustable blowdown	2% to 7%	2% to 7%
Leak tight seats at % of set pressure	95% to 98%	96% to 99%
Main valve seat tight to set point	Yes	Yes
Field test connection	Yes	Yes
Gas, liquid and steam service (ASME B & PVC, Section VIII)	Yes	Yes
Non-Flowing pilot	Yes	Yes
Pilot construction entirely stainless steel	Yes	Yes
Set point repeatability to within +/-2%	Yes	Yes
50 micron filter protects pilot	Yes	Yes
Designed for ease of maintenance	Yes	Yes

Note: The 3900 series pilot is convertible to either pop action or modulating action.

Total Service


BHGE is a total solutions provider of pressure relief products, offering customers unmatched application expertise combined with worldwide sales support.

Reliable Protection

Consolidated 39MPV series pilot-operated safety relief valves are designed to provide reliable protection for a broad range of pressurized systems applications. The operating characteristics and design of pilot-actuated relief valves differ significantly from spring loaded pressure relief valves. Users should recognize the distinct merits of each design, and select the valves that best meet their particular needs. BHGE's pressure relief valve designs meet most application requirements for the industries we serve.


BHGE works to provide you with the best available information, data and assistance in the selection and application of our products. Our sales and service consultants are available to help you select the valve that best fits your specific application.

Metal Seat

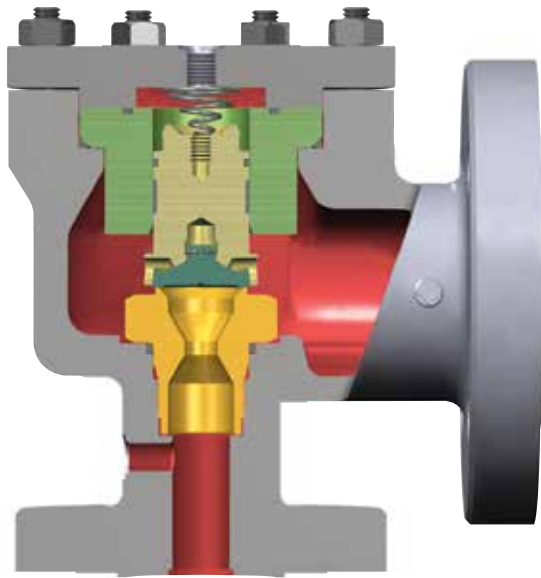

The Consolidated 3900 series pilot-operated safety relief valve is supplied with a non-flowing pilot valve. This single pilot design is well-suited for both incompressible and compressible applications and performs equally well on liquid, vapor or two-phase flow services. The set pressure will not require adjustment if service conditions change.

Soft Seat: Liquid, Gas & Steam Service

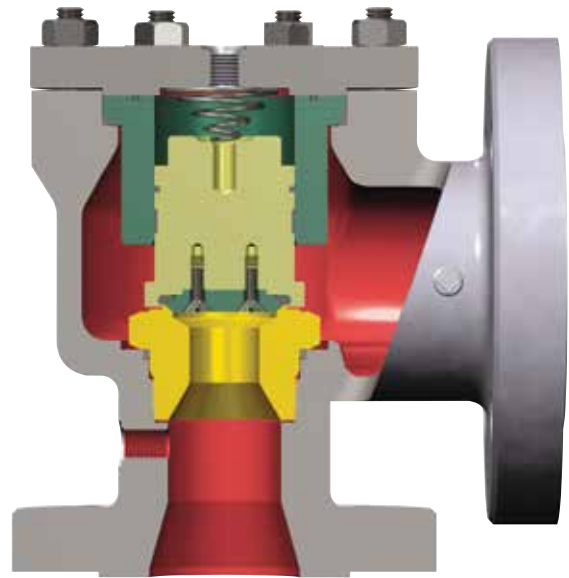

Because of its modular design, the 39PV (pop action pilot) can be converted to a 39MV (modulating action pilot), making Consolidated 39PV/39MV pilot valve one of the most versatile pilot valves available today.

Standards and Regulation Compliance

Standard/Regulation	Authority	Applicability
ISO 9001	International Organization for Standardization (ISO)	Standard
ISO 14001	International Organization for Standardization (ISO)	Standard
ASME B & PVC, Section VIII (Gas, Liquid & Steam Service)	American Society of Mechanical Engineers	Standard
ASME B16.34	American Society of Mechanical Engineers	Standard
ASME B16.5	American Society of Mechanical Engineers	Standard
API 520, 521, 526, 527	American Petroleum Institute	Standard
CRN	Canada	As Required
NACE MR0175	Nace International Institute	As Required
NACE MR0103	Nace International Institute	As Required
PED 97/23/EC	European Union	As Required
ISO 4126-4	International Organization for Standardization (ISO)	As Required
Customs Union Technical Regulation (CU TR)	Customs Union	As Required
AQSIQ - China Manufacturing License	Peoples Republic of China	As Required
Australian Standards	Council of Standards Australia	As Required
NORSOK	Norwegian Petroleum Industry	As Required
ATEX 94/9/EC Zone 2 Group 2 Category 3	European Union	As Required
49 CFR 192.199	U.S. Department of Transportation (D.O.T.)	Standard
Korean High Pressure Gas Safety Control Act	Korea	Standard

DIRECT SALES OFFICE LOCATIONS

AUSTRALIA

Brisbane:
Phone: +61-7-3001-4319
Fax: +61-7-3001-4399

Perth:
Phone: +61-8-6595-7018
Fax: +61-8-6595-7299

Melbourne:
Phone: +61-3-8807-6002
Fax: +61-3-8807-6577

BELGIUM

Phone: +32-2-344-0970
Fax: +32-2-344-1123

BRAZIL

Phone: +55-19-2104-6900

CHINA

Phone: +86-10-5738-8888
Fax: +86-10-5918-9707

FRANCE

Courbevoie
Phone: +33-1-4904-9000
Fax: +33-1-4904-9010

GERMANY

Ratingen
Phone: +49-2102-108-0
Fax: +49-2102-108-111

INDIA

Mumbai
Phone: +91-22-8354790
Fax: +91-22-8354791

New Delhi

Phone: +91-11-2-6164175
Fax: +91-11-5-1659635

ITALY

Phone: +39-081-7892-111
Fax: +39-081-7892-208

JAPAN

Tokyo
Phone: +81-03-6871-9008
Fax: +81-03-6890-4620

KOREA

Phone: +82-2-2274-0748
Fax: +82-2-2274-0794

MALAYSIA

Phone: +60-3-2161-0322
Fax: +60-3-2163-6312

MEXICO

Phone: +52-55-3640-5060

THE NETHERLANDS

Phone: +31-15-3808666

RUSSIA

Veliky Novgorod
Phone: +7-8162-55-7898
Fax: +7-8162-55-7921

Moscow

Phone: +7 495-585-1276
Fax: +7 495-585-1279

SAUDI ARABIA

Phone: +966-3-341-0278
Fax: +966-3-341-7624

SINGAPORE

Phone: +65-6861-6100
Fax: +65-6861-7172

SOUTH AFRICA

Phone: +27-11-452-1550
Fax: +27-11-452-6542

SOUTH & CENTRAL

AMERICA AND THE CARIBBEAN
Phone: +55-12-2134-1201
Fax: +55-12-2134-1238

SPAIN

Phone: +34-93-652-6430
Fax: +34-93-652-6444

UNITED ARAB EMIRATES

Phone: +971-4-8991-777
Fax: +971-4-8991-778

UNITED KINGDOM

Bracknell
Phone: +44-1344-460-500
Fax: +44-1344-460-537

Skelmersdale

Phone: +44-1695-526-00
Fax: +44-1695-526-01

UNITED STATES

Jacksonville, Florida
Phone: +1-904-570-3409

Deer Park, Texas

Phone: +1-281-884-1000
Fax: +1-281-884-1010

Houston, Texas

Phone: +1-281-671-1640
Fax: +1-281-671-1735

bhge.com

*Denotes a trademark of Baker Hughes, a GE company LLC.

Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

© 2018 Baker Hughes, a GE company LLC - All rights reserved.

Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your BHGE representative for the most current information. The Baker Hughes logo is a trademark of Baker Hughes, a GE company. The GE Monogram is a trademark of the General Electric Company.

GEA20254B 10/2018

**BAKER
HUGHES**
a GE company

